




CARPET
TILES

DYNAMIC COLLECTION

AIRLAY 


DYNAMIC COLLECTION

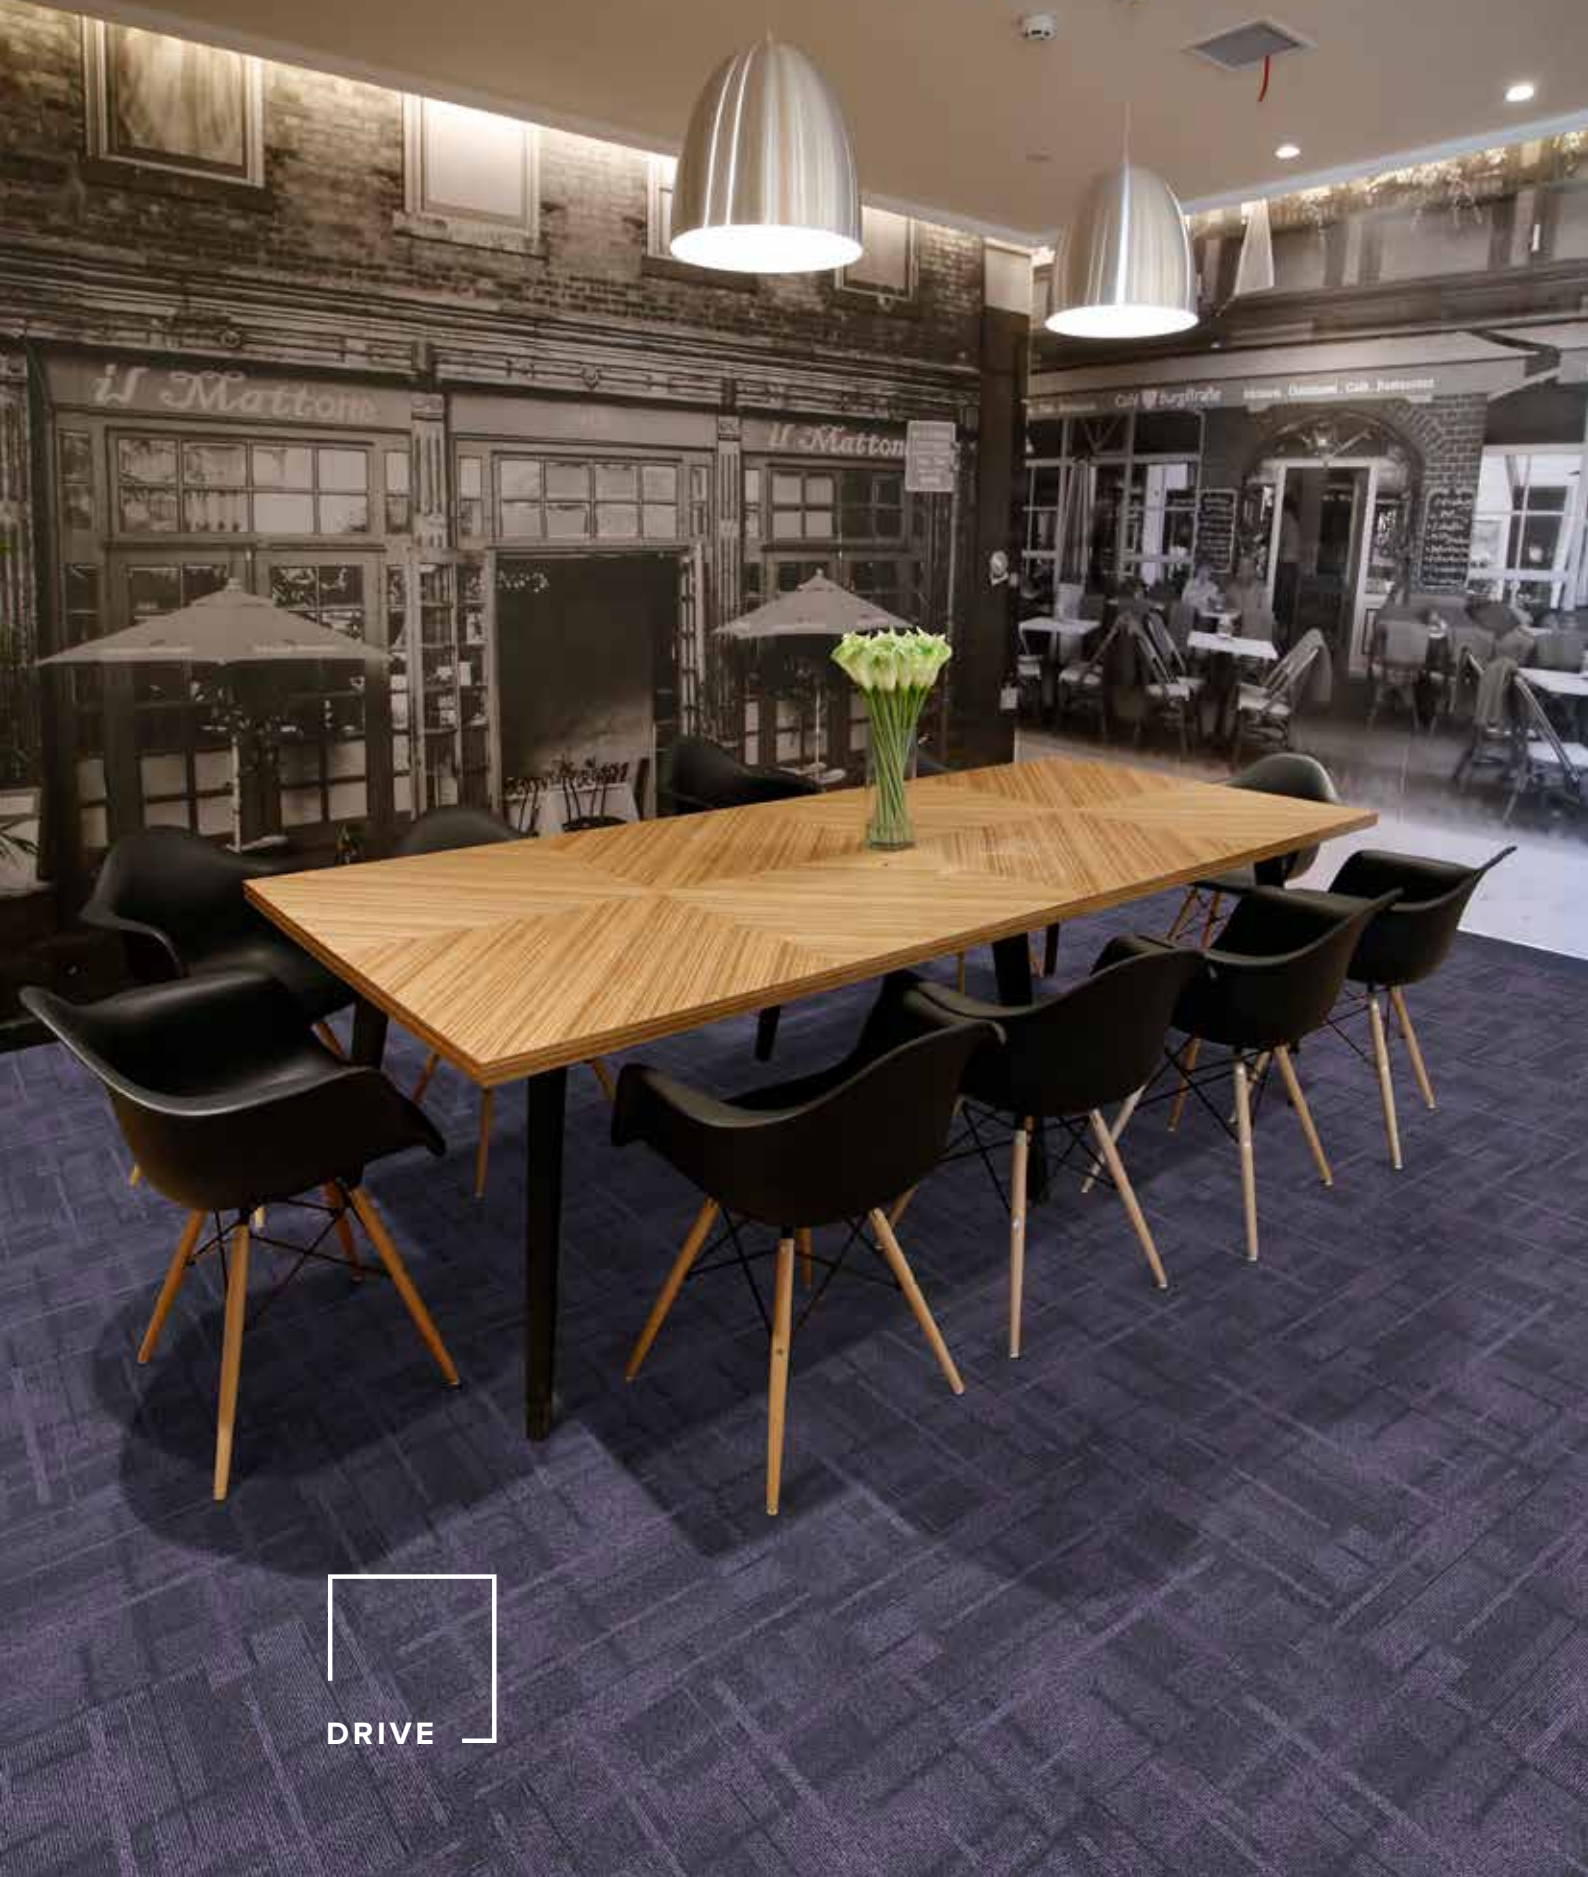


DRIVE



EFFECT

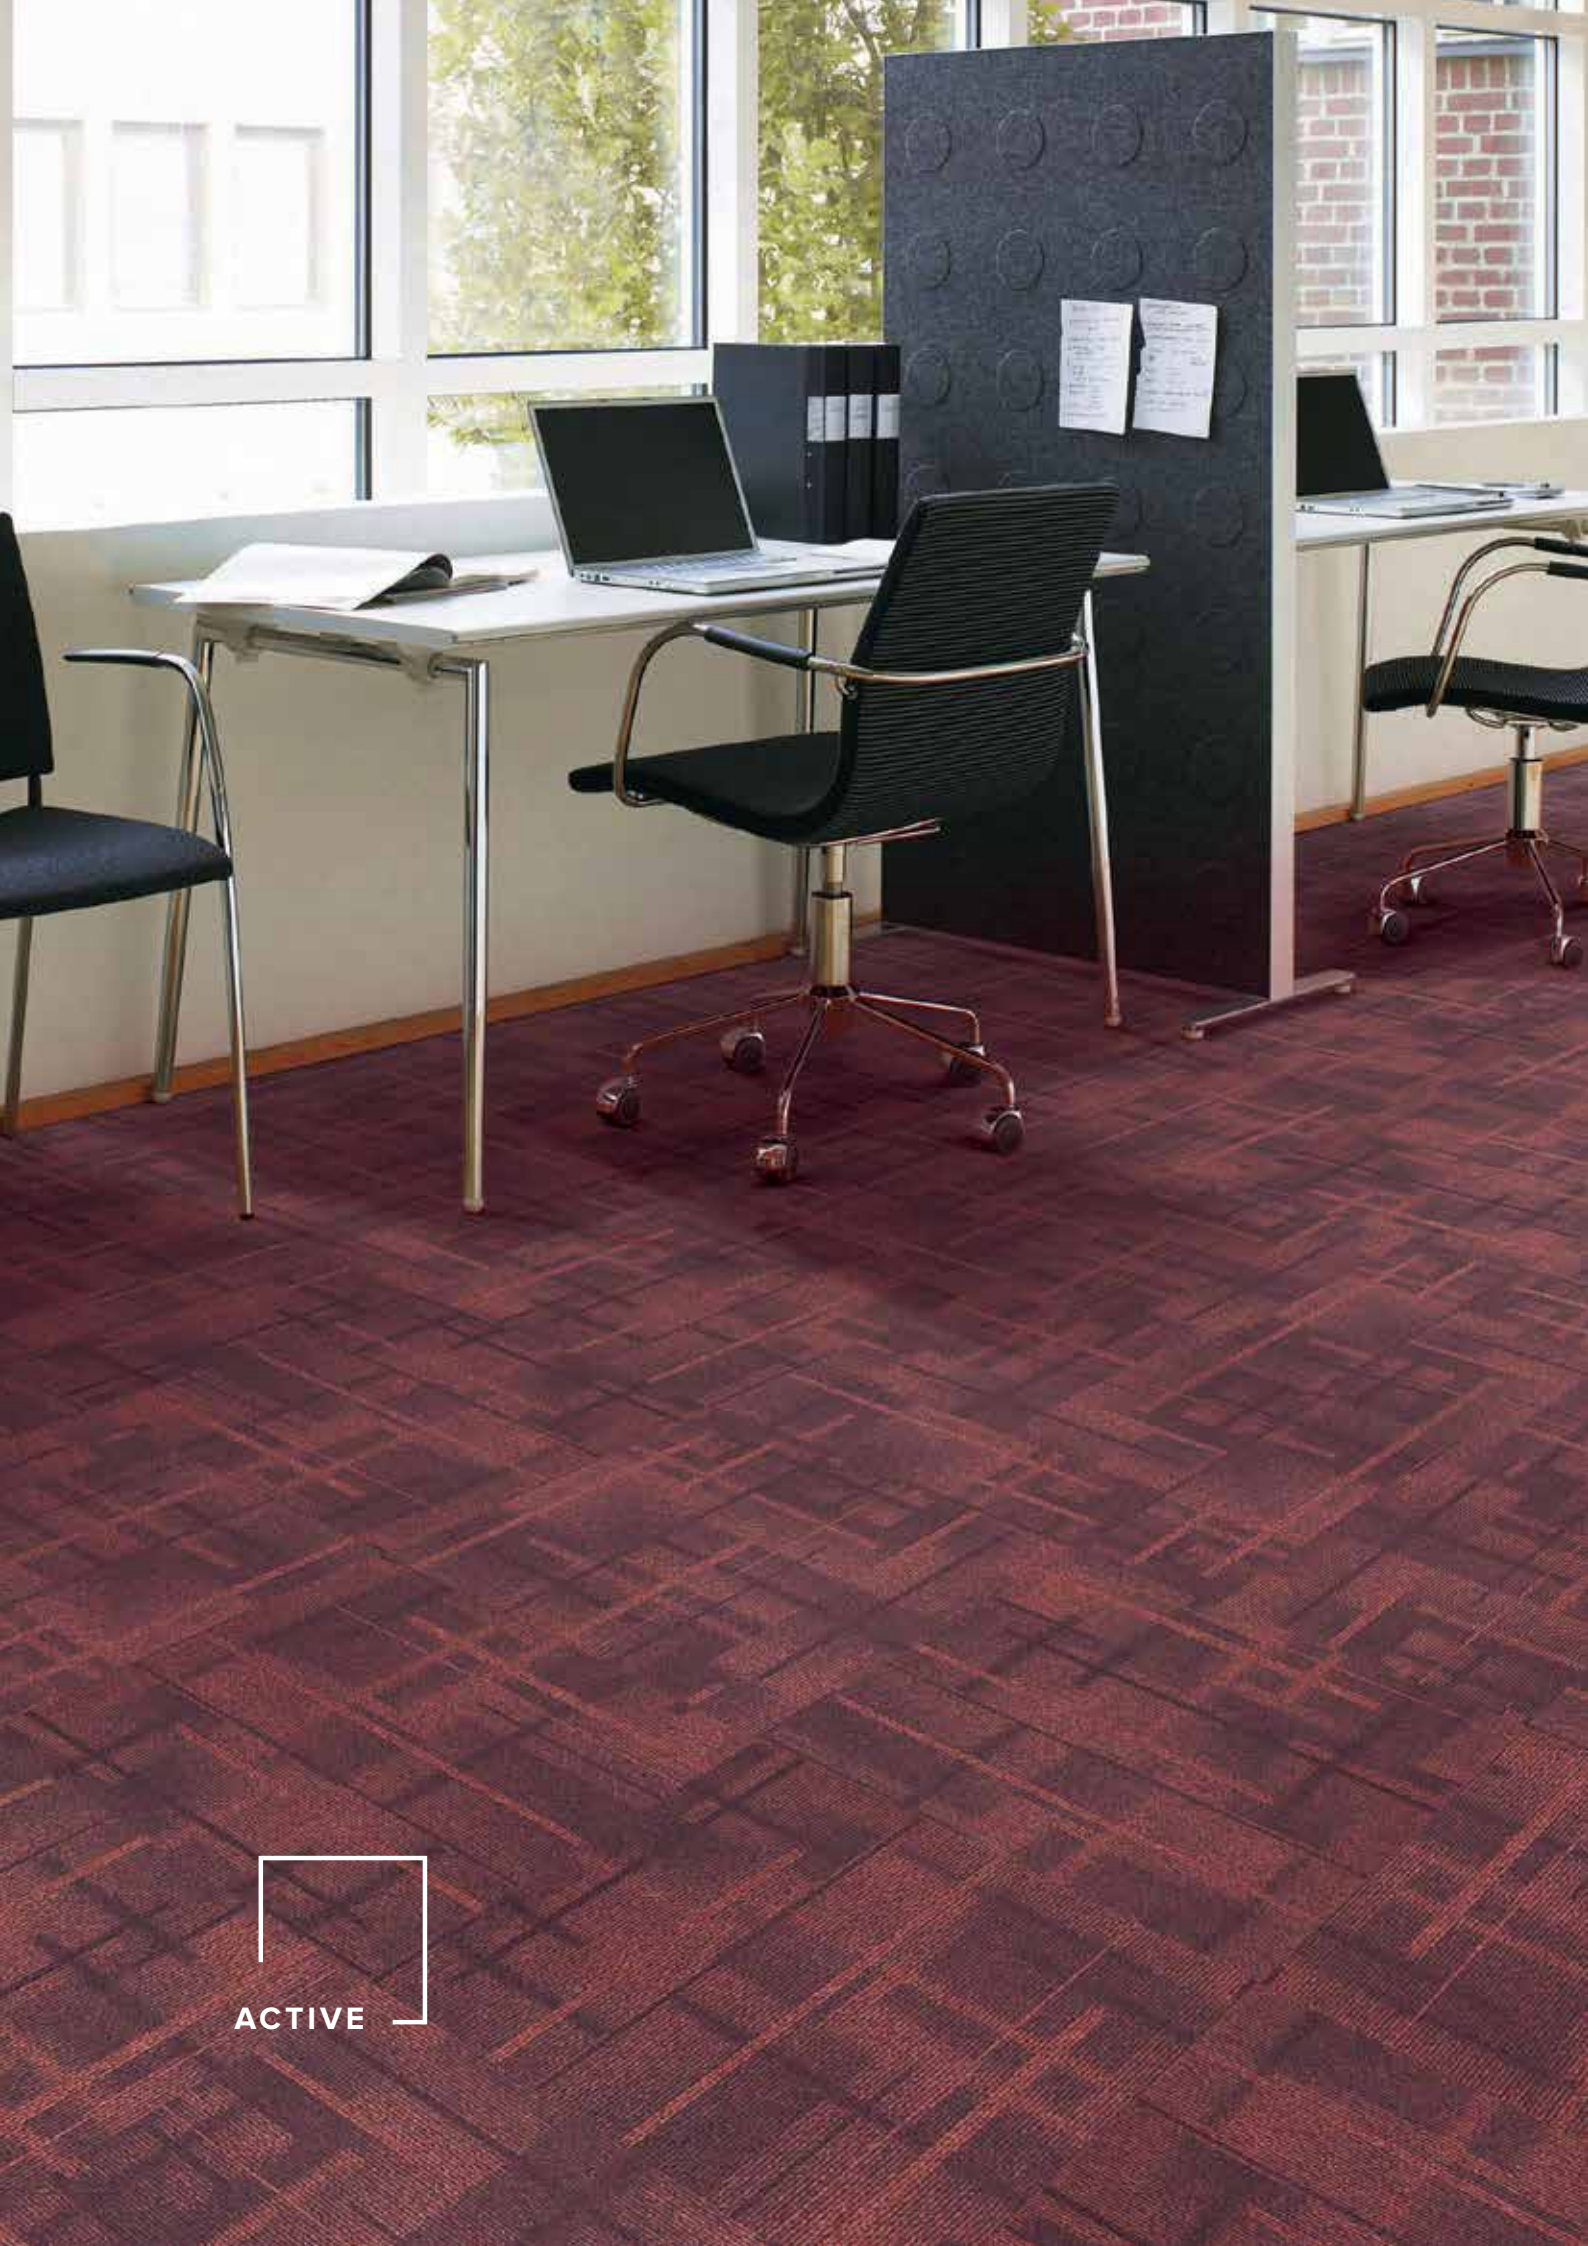

ACTIVE

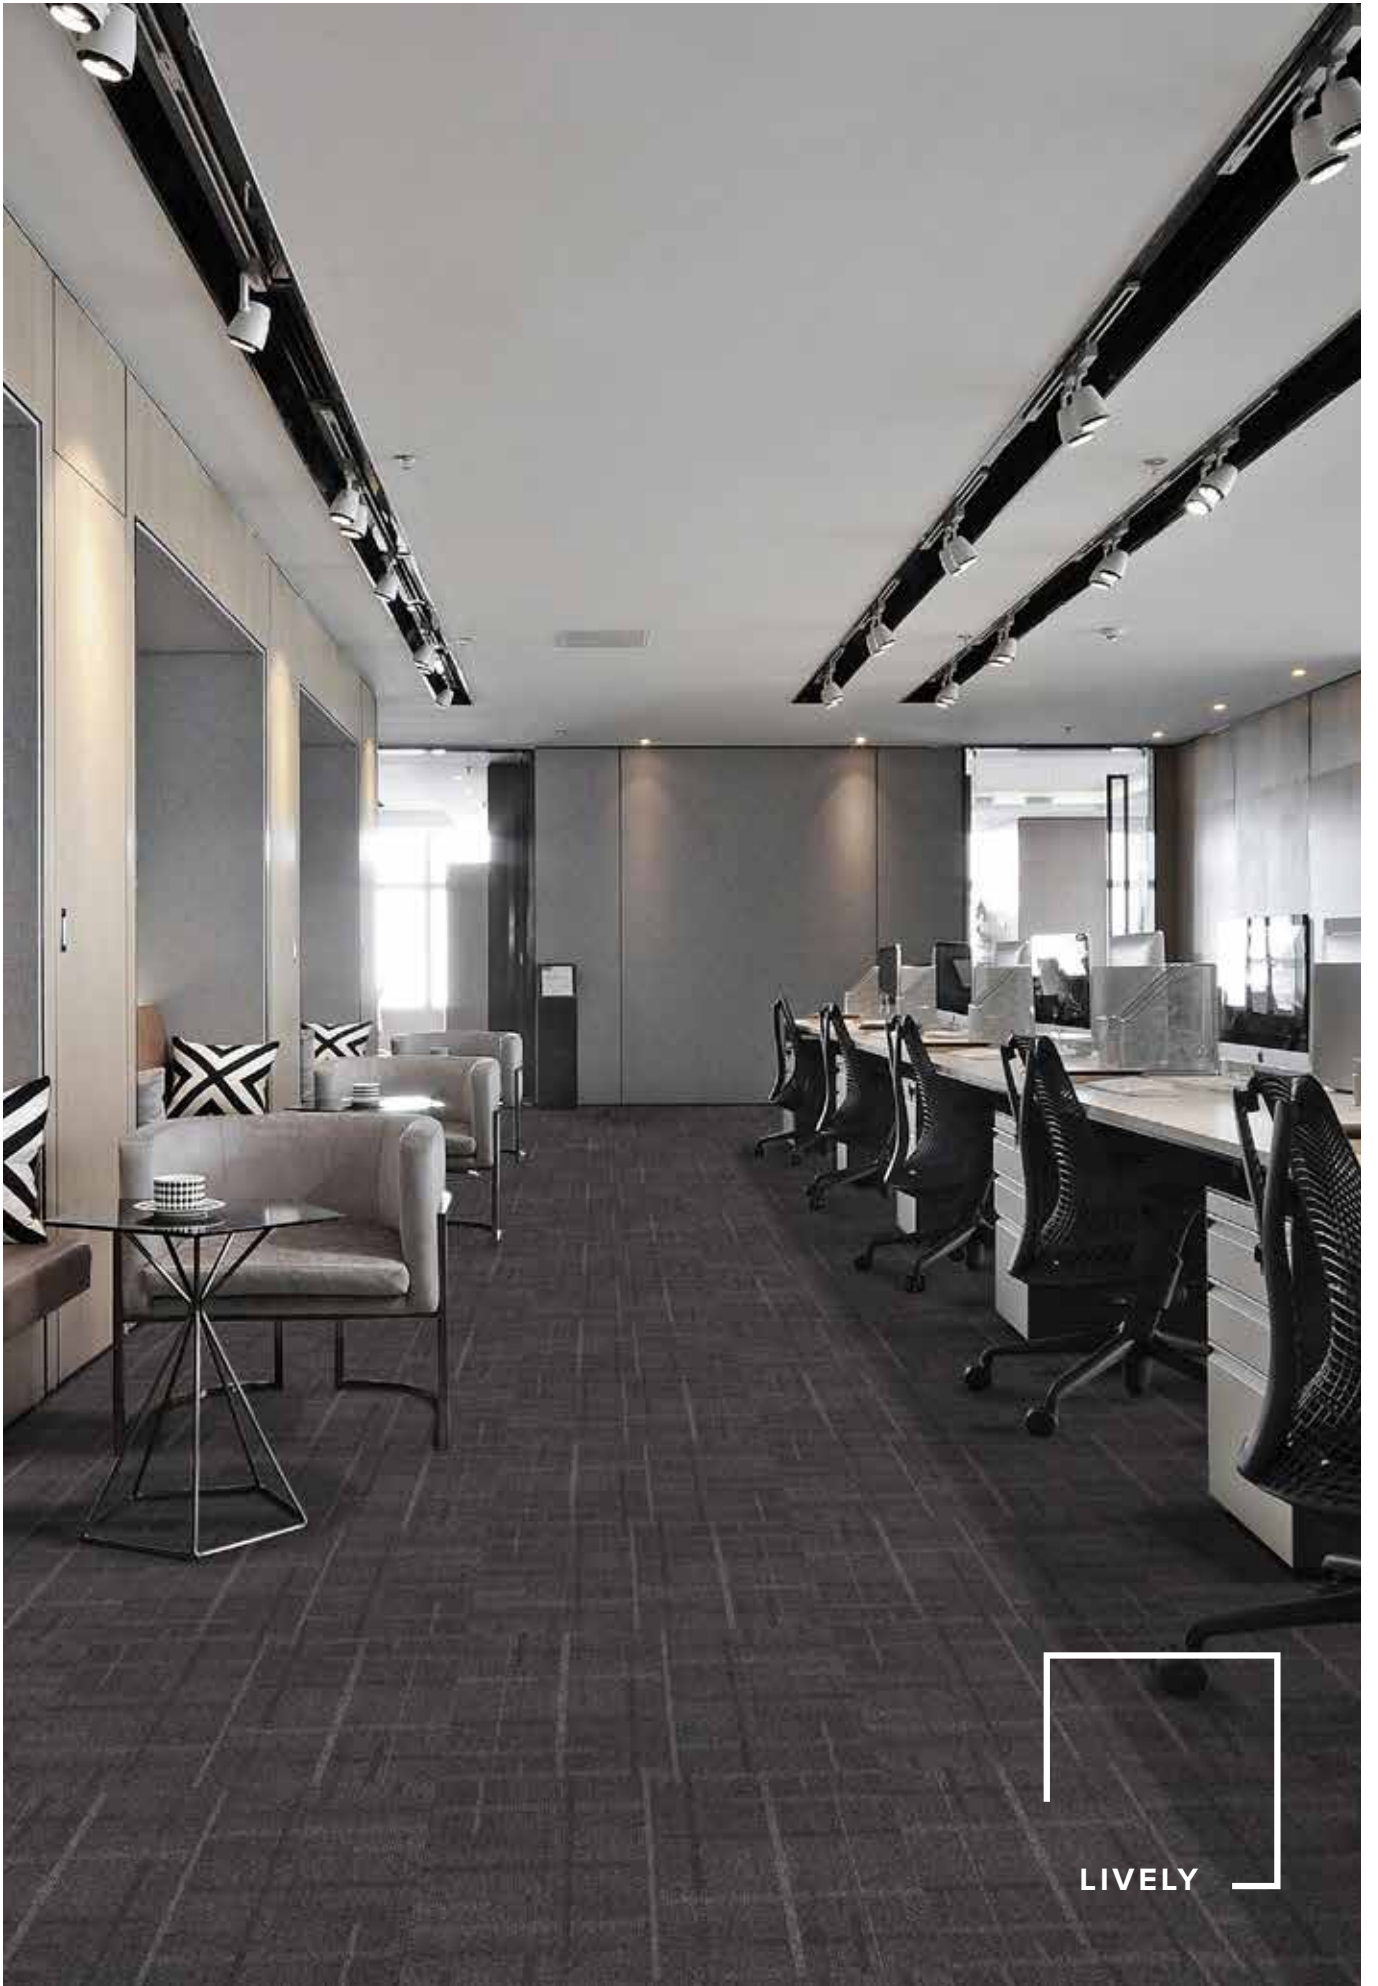


LIVELY




VITAL




ENERGY

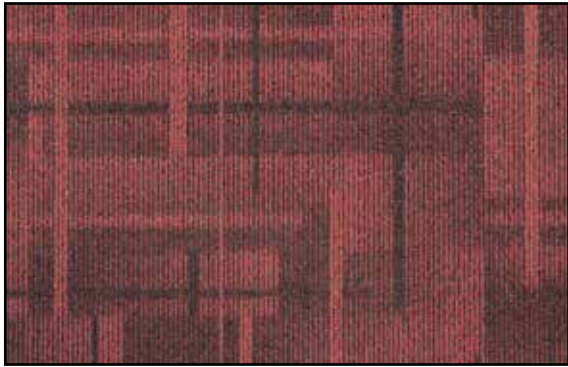


ACTIVE

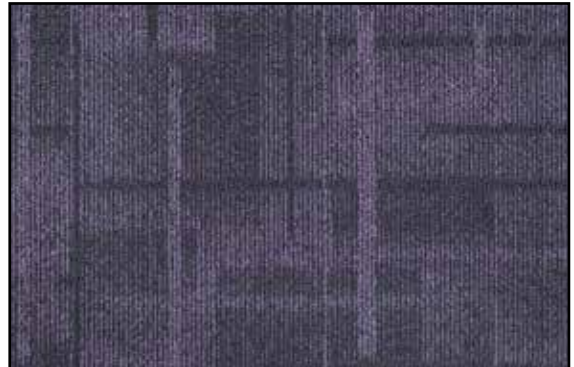


DRIVE

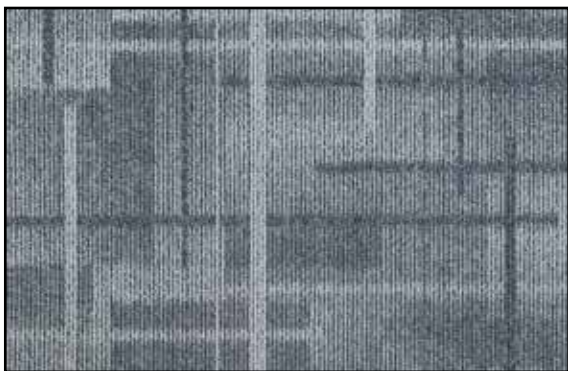


BOLD

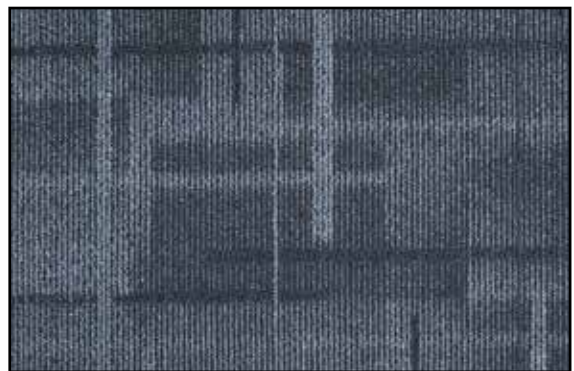

EFFECT

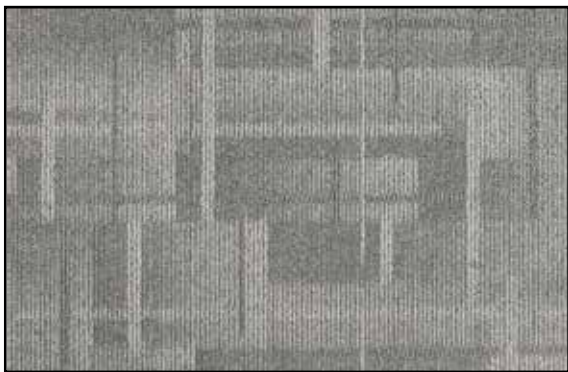

VITAL

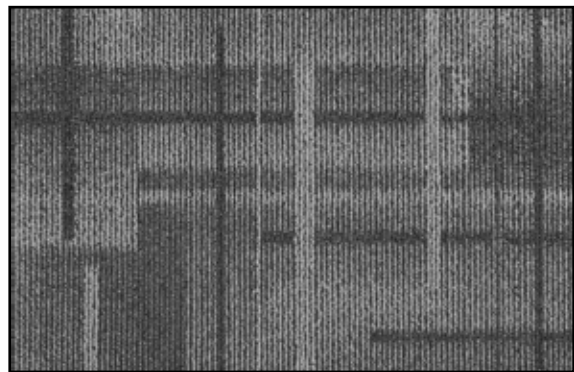

ENERGY




LIVELY



**DYNAMIC
COLLECTION**

DYNAMIC

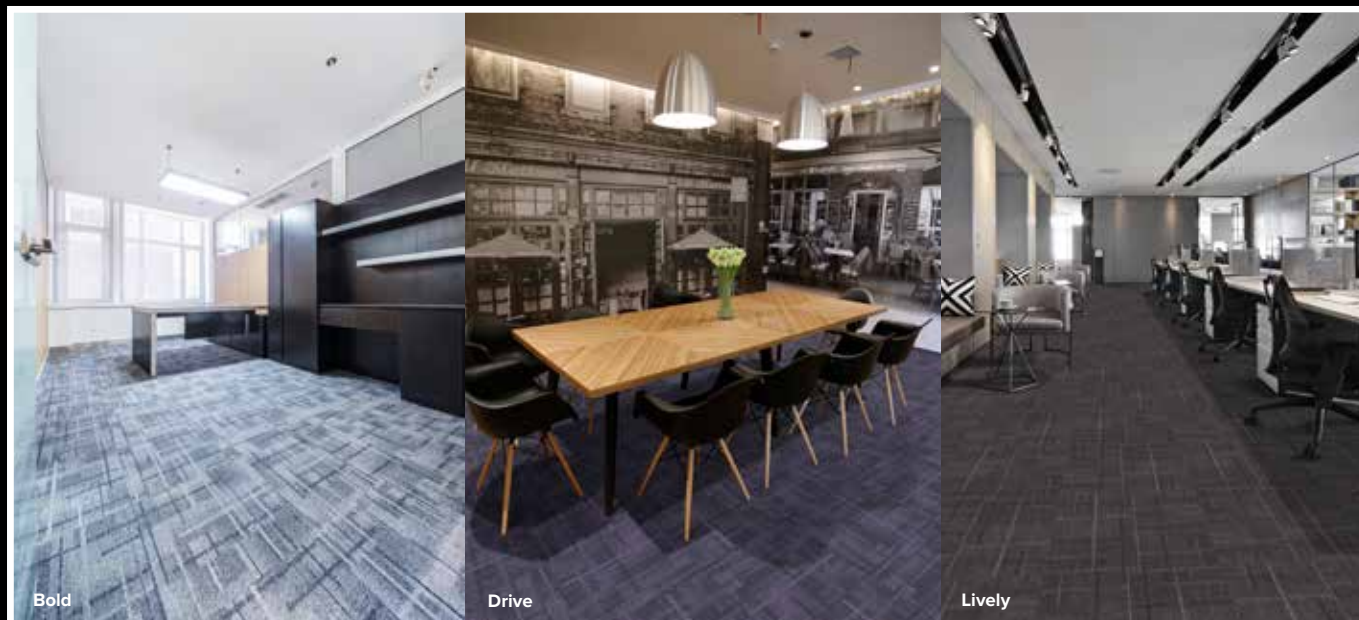

TECHNICAL SPECIFICATIONS


Product Range	Dynamic
Product Description	Tufted Multi-Level Loop Carpet Tile
Yarn / Fibre	100% Solution Dyed Nylon
Machine Gauge	1/12th
Pile Height	4mm +/-0.5mm
Total Thickness	7mm +/-0.5mm
Tile Size	50cm x 50cm
Backing Structure	PVC with Recycled Content
Tile Installation Method	Quarter Turn, Brick, Ashlar

SUSTAINABILITY SPECIFICATIONS

Less Waste	Modular carpet creates 85 – 90% less waste than broadloom carpet
Product Stewardship	100% take back & repurpose through accredited partner
Recycled Content	Minimum of 55% recycled content in the backing structure Average of 40% recycled content by weight of product

PERFORMANCE SPECIFICATIONS

Area of Use	Commercial
Dimensional Stability	Less than 0.2% variation
Biocontaminant Control	Ultra Fresh Anti-microbial treated
Anti-Static	AATCC134 < 3000 Volts
Warranty	15 year limited warranty: • Manufacturing defect • Dimensional stability • Electrostatic propensity



Specifications are subject to and may change without notice.
Colour variation may occur between sample and production due to dye lot tolerances.