
PARAGON

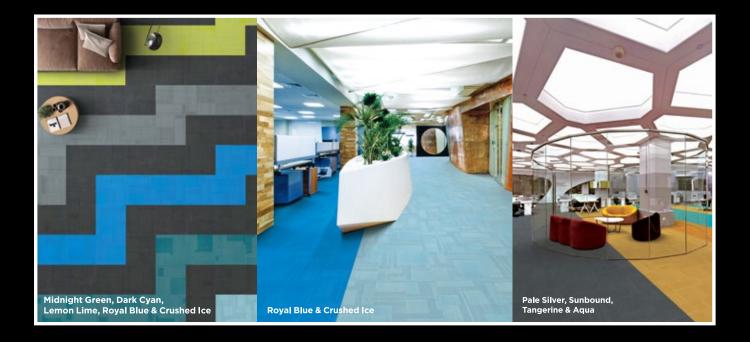

TECHNICAL SPECIFICATIONS

Product Range Paragon

 Product Description
 Multi-Level Loop Carpet Tile

 Yarn / Fibre
 100% Solution Dyed Nylon 6

Machine Gauge 1/12th

 Pile Height
 4mm +/-0.5mm

 Total Thickness
 7mm +/-0.5mm

 Tile Size
 50cm x 50cm

 Backing Structure
 PVC with Recycled Content

 Tile Installation Method
 Quarter Turn, Brick, Ashlar

SUSTAINABILITY SPECIFICATIONS

Less Waste Modular carpet creates 85 – 90% less

waste than broadloom carpet

Product Stewardship 100% take back & repurpose through

accredited partner

Recycled Content Minimum of 55% recycled content in the

backing structure

Average of 40% recycled content by

weight of product

PERFORMANCE SPECIFICATIONS

Area of Use

Dimensional Stability

Biocontaminant Control

Anti-Static Warranty Commercial

Less than 0.2% variation

Ultra Fresh Anti-microbial treated

AATCC134 < 3500 Volts

15 year limited warranty:

• Manufacturing defect

• Dimensional stability

• Electrostatic propensity









Specifications are subject to and may change without notice.

Colour variation may occur between sample and production due to dye lot tolerances.



Head Office: 25-27 Lakeside Drive Broadmeadows, VIC 3047

Phone: (03) 9359 4705 Email: sales@airlay.com.au

WWW.AIRLAY.COM.AU