

NATURE'S OAK

Wood in all its glory



EXTRA WIDE BOARDS IN TRENDY DESIGNS

The Nature's Oak range uses character grade European Oak, designed to bring the features of the forest to your floor. These rustic features are matched with a brushed and textured matt surface for a classic timeless look and feel. Bevels on the long side, and a palette of contemporary colours provide a platform for any modern interior.

HIGHLY SCRATCH, WEAR AND STAIN RESISTANT

The planks are finished with a highly scratch, wear and stain resistant European lacquer for optimal performance. In fact, testing has shown that Nature's Oak is coated with one of the most wear resistant pre-finished coatings available, offering complete peace of mind well into the future!



STRONGEST JOINING SYSTEM

Nature's Oak comes with the best and strongest joining system in the world, Uniclic®, profiled on all four sides of each and every board. This ensures fast and easy installation with no gaps.

SUPERIOR STABILITY

Nature's Oak planks have superior stability thanks to the stable and durable plantation hardwood core, ensuring that your floor stays beautiful for years and years to come. Nature's Oak is manufactured to the highest standards in the world in our own European operated plant.



GRADING

Nature's Oak contains a lively level of variation in colour and grain structure. Planks have been selected with large filled knots to provide an authentic "forest to the floor" charm.

Colour

lively variation



Knots (measured in accordance with EN3109)

max. 80 mm, qty per panel - no limit



Sapwood

allowed

IT'S NATURAL

Remember, Timber is a natural product and includes all the features of the forest. This provides for a selection of knots and other natural features in line with the beauty of natural oak. Colour and grain variation from the sample, and within the floor is to be expected and distinguishes your Nature's Oak as natural timber, not a manufactured imitation.

Remember wood flooring is not colour fast. Whenever samples or flooring are exposed to natural light, they will change colour. This is a natural part of wood.

Also remember that there is always some slight noise associated with any wood flooring systems, this is a normal part of wood flooring and may vary from time to time with the climate.


CREATING A TIMBER FRIENDLY INDOOR ENVIRONMENT

Timber floors should not be installed more than two weeks prior to a new dwelling being occupied with window coverings installed so that the floor will experience normal 'interior' conditions. Otherwise, extreme indoor conditions may lead to cracking, shrinking, cupping or other distortion of the wood flooring. Such damage resulting from extreme conditions is not covered by warranty.

Nature's Oak is genuine timber flooring, therefore proper care and maintenance is required to avoid unnecessary marking and scratching.


RANGE

LENGTH: 1820mm | WIDTH: 190mm | THICKNESS: 14mm nominal | 1 BOX: 6 PLANKS $\approx 2.075\text{m}^2$ (up to 4 shorter boards per pack)

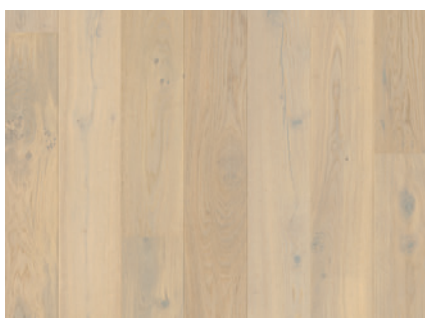


ARCTIC WHITE

WBO0008

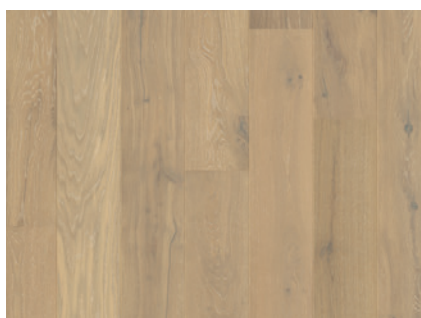


EIGER

WBO1008

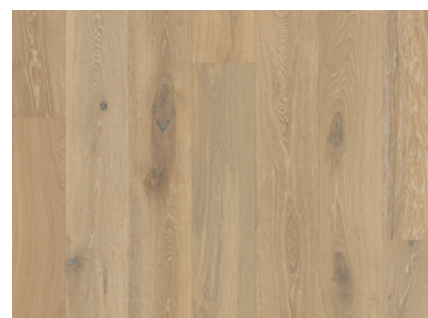

BLANC

WBO2008

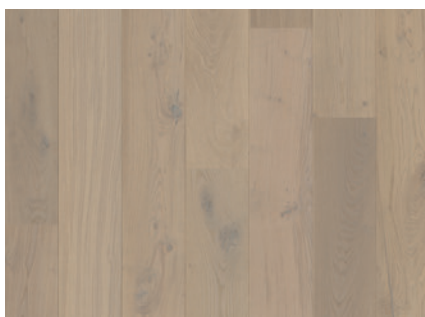

ASPEN GREY

WBO3008




SIERRA

WBO4008



KILIMANJARO

WBO5008

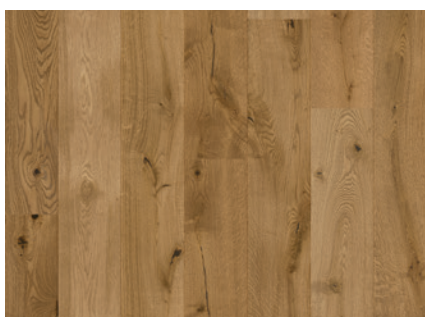


MATTERHORN

WBO6008




EVEREST

WBO7008

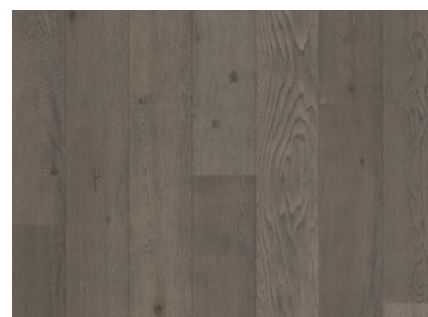

FRENCH GREY

WBO8008

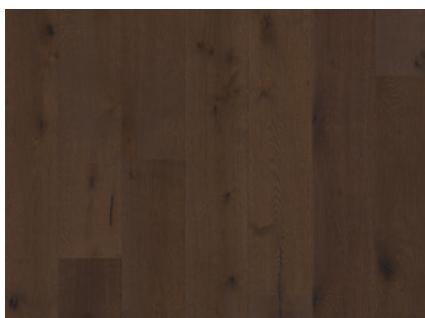

BLACK FOREST

WBO9008

All product images provide an indication only of variation in colour, grain and knots. Colour and grain variation from board to board, and the number and size of knots will vary, in accordance with the grading on page 4.

20 year wear*
warranty

structural lifetime
warranty



* Residential applications only

INSTALLATION

Floating or glued down, it's your choice! Thanks to the Uniclic® joining system, Nature's Oak can be installed as a floating floor or glued directly to dry, level and clean subfloors like timber or concrete.


FLOATING

Nature's Oak can be installed as a floating floor on a high quality underlay which will reduce footfall sound. This method has a lot of advantages. The installation is faster and you can enjoy your floor immediately, no waiting time for the glue to dry. It is also easier to take up than glue-down floors, and easier to repair in the event that one or two boards become damaged down the track!

GLUED DOWN


On the other hand, Nature's Oak can also be installed glued down. This installation method is often selected to reduce some footfall sound. It also has a couple of disadvantages, for instance, the floor must be completely flat, dry and clean before installing and board replacement is considerably more difficult. Ask your retailer for more information.

METHOD 1 : ROTATE AND CLICK

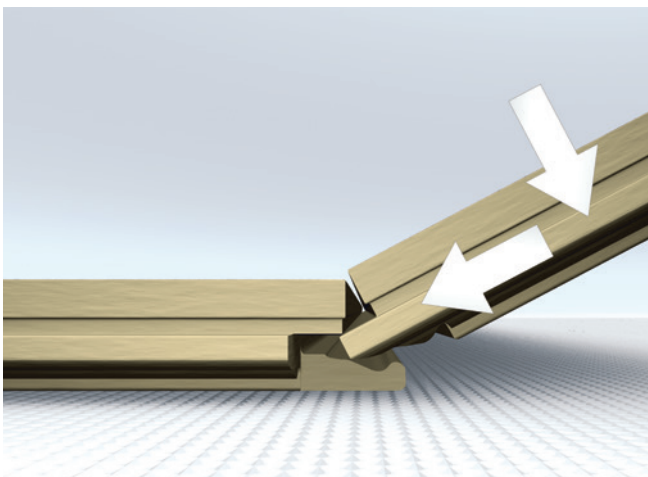

Hold the panel to be installed at an angle of 20° to 30°. Move the panel gently up and down and at the same time exert forward pressure. The panels will automatically click into place.

METHOD 2 : HORIZONTAL INSERTION

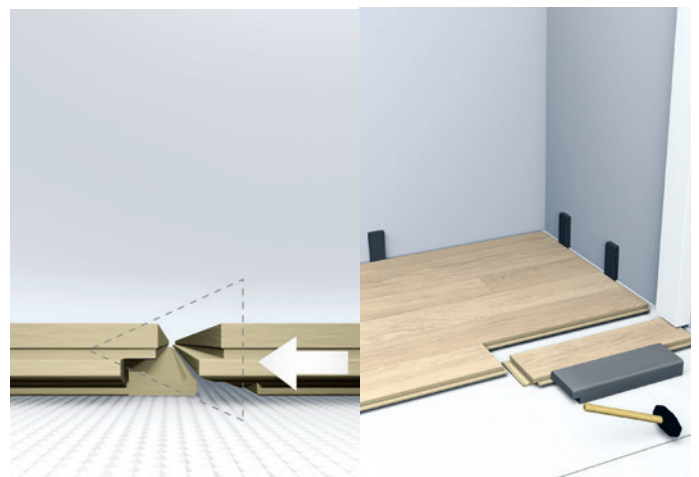

Ideal for awkward corners or installing under door frames. Unlike most other systems, Uniclic® panels can also be joined together horizontally. This is essential when you install the last row of panels to be installed or in places where it is difficult or even impossible to rotate the panels (underneath door frames, for example).





Premium

FLOORS AUSTRALIA

www.premiumfloors.com.au

Adelaide	Tel.: (08) 8262 8666
Brisbane	Tel.: (07) 3273 3111
Melbourne	Tel.: (03) 9798 0808
Northern Terr.	Tel.: (08) 8262 8666
Perth	Tel.: (08) 9240 1966
Sydney	Tel.: (02) 9982 3777
Tasmania	Tel.: (03) 9798 0808

Commercial Division Tel.: (03) 9798 0808

Photo back cover: WBO6008 - Matterhorn. All product images provide an indication only of variation in colour, grain and knots. Colour and grain variation from board to board, and the number and size of knots will vary, in accordance with the grading on page 4. Contents © 2019 by Premium Floors Pty. Ltd. All rights reserved. The contents of this brochure may not be reproduced in whole or in part without prior written permission from the publisher.