

Prime *Legend Collection*



Dyna Core+[®]

The Most Premium Range within Laminate Flooring

72 hours | 360° Water Proof Warranty*

*conditions apply refer to Prime Laminate Legend Collection Warranty.



TOPDECK FLOORING

Topdeck Flooring

As a leading timber floor wholesaler and supplier in Australia, we declare that all products imported by Topdeck Flooring are legally sourced and logged from sustainably managed forests. All of our partners and factories are held with FSC or PEFC Chain of Custody Certifications and our product is purchased within the scope of certifications.

Dyna Core⁺


Prime Laminate - Legend Collection, represents the next generation of Dyna Core laminate floorboards, which manages to combine numerous advanced manufacturing techniques together, gives an authentic hardwood texture. The utilisation of the world's latest Aquashield Tech allows for the surface of the floorboards to be waterproof. This new product allows you to enjoy the timeless, natural beauty of hardwood floorboards without needing to worry about water damage.

Negative Ion Technology



The excellent performance characteristics of Dyna Core+ (upgraded version of Dyna Core) prolongs the water resistant time to 72 hours from the bottom of the boards. It also allows for the floorboards to be stable in all dimensions with little to no movement.

AquaShield Tech Laminate



Every plank is processed with enhanced, scuff-resistant technology, enabling it to achieve the highest commercial scratch resistant rating of AC5, making it perfect for everyday use.

Further, as a bonus, the application of the world's latest Negative Ion Technology on the surface of each plank enables the floor to consistently release tourmaline into the air, assisting in human body circulation, mental alertness, stress relief and improving immune system strength.



Proud to be a Member of the

atfa
Australian timber flooring association

www.topdeckflooring.com.au

Negative Ion Technology



Negative Ion


Home furniture and building materials release some amount of formaldehyde and other volatile organic compounds, including odors, bacteria, smoke and others. In the air, they are all positively charged and we call them positive ions, which are harmful to human health.

Under normal temperature and conditions, water and oxygen in the air cannot be negatively charged to negative ions. However, under the action of strong electromagnetic field, this kind of transformation occurs.

Topdeck's Negative Ion Technology floor adds a layer of material with positive and negative electrodes during production process. This layer is

attached to the floor surface, which is called the negative ion catalyst (common name is 'tourmaline'). The water in the air enters the electromagnetic field formed by the positive and negative electrodes, it will turn into negative ions, which can be neutralized by the positive ions until there is no charge, and make the air purified.

What is Negative Ion Technology floor?

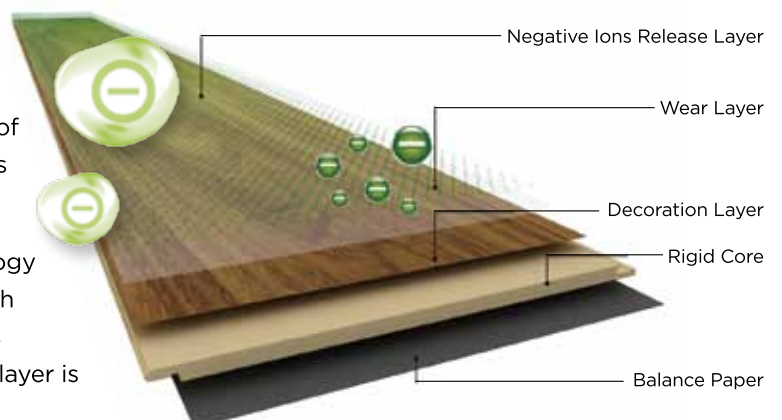



AquaShield Tech Laminate

Protects against the spills and messes you might miss

**Surface
Water Proof
is no longer
a dream**




1. Click Technology - Less Leakage



AFTER:
tighter lock,
less leakage

2. Aquashield Tech Treatment on the bevel and click tongues



3. Specialized HDF - More water resistant treatment

Specialized treatment
in the core





7701

Atlantic Oak



Atlantic Oak



7702

Wheaton Oak

Wheaton Oak



7703

Hudson Grey

Hudson Grey



7704

Sandcastle Oak



Sandcastle Oak



7705

Southport Oak



Southport Oak



7706

Empire Oak



Empire Oak



7707

Spotted Gum



Spotted Gum



7708

Blackbutt



Blackbutt



7709

Mainland Brown Oak



Mainland Brown Oak



7710

Ghost Oak



Ghost Oak

PRIME LAMINATE LEGEND COLLECTION

TECHNICAL SPECIFICATIONS



EN
EN13329

E0
DIN EN120

B₁

ISO9001

ISO14001



AC5

TYPE

Prime Laminate Legend Collection

DIMENSIONS

2200mmx239mmx12.3mm
Pack: 2.103m²/ctn

INSTALLATION METHOD

Floating Floor (5G Licensed Click System)

SLIP RATING

AS 4586 (2013) Slip Resistance Classification
of New Pedestrian Surface Materials
Appendix A - Wet Pendulum Test
Achieved a pass of P4

FIRE RATING

Critical Heat/Radiant Flux (CHF)
(AS ISO 9239.1) Pass the AS ISO 9239.1
Standard as required by the Australian National
Construction Code

ABRASION CLASS

AC33 = AC5 refers to the EU Standard for the
Wear Layer Scratch Resistance
AC5 - Laminate can Withstand any Type of Heavy
Residential Traffic

PRODUCTION METHODS

German Manufacturing Technology

ENVIRONMENTAL & QUALITY CERTIFICATES

E0 Formaldehyde Emission EN ISO9001, ISO14001

STRUCTURAL WARRANTY

Life Time Structure Warranty (Please Refer to
Prime Laminate Legend Collection Warranty Paper)



quick and easy
installation



slip resistance



glue-free
installation



easy
maintenance



abrasion
resistance



color fastness
to light



resistance to
cigarette ash



warm to the
touch



resistance to
water



indentation
resistance



static
resistance



high elasticity

Combining quality & environmental control standards throughout the manufacturing process.



Note: Colour grain & feature patterns may vary from the actual product to the electronic and printed media.
For detail maintenance & installation guidelines please refer to the website.



*Quality is our attitude, as we are
always striving to meet and exceed
our customers expectations.*



TOPDECK FLOORING

www.topdeckflooring.com.au

Importer & Supplier of Quality Floor Boards

16 Salisbury Street, Silverwater, NSW 2128 Australia

Phone: 02-9748 2288 | Fax: 02-9748 2266

Email: info@topdeckflooring.com.au